



# NAX

NABCO Hermetic Door

NABCO's hermetic door with high air tightness, aesthetic and safety





NABCO's new hermetic door with **high air tightness, aesthetic and safety**. With the **original hermetic mechanism**, NAX provides high air tightness in a optimal way for various scenes.

## Air Tightness

- High class of air tightness 【JAPAN】 JIS A 4702: Class A-4  
\*Equivalent of 【EU】 UNE-EN 12207: Class 4


## Aesthetic

- Smallest header size in the industry
- Wide range of door leaves and handle (\*Pls. refer to back page.)


## Safety

- Possible to be fully opened without any clearance left
- Easy to open manually in case of a power failure

NAX Airtightness performance (Single sliding door)

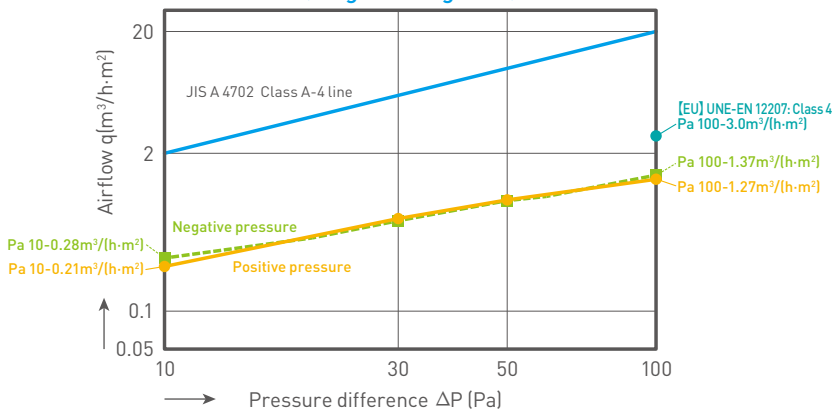

NAX Sound insulation performance (Single sliding door)

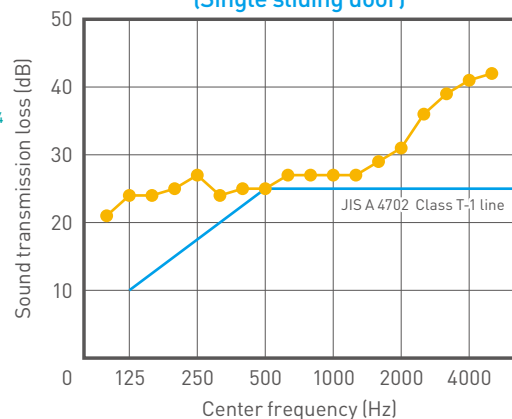

## Example of use

● Operating room  
Requires high air tightness

● Radiotherapy room  
Requires X-ray shield

● Food processing factory  
Requires hygiene management (HACCP)


● Warehouse/Factory  
Requires air conditioning

● Conference room  
Requires sound insulation

## Dimension


### ● Elevation

【Stainless steel】There is a joint line when the door width is over 1100.  
 【Aluminum】There is a joint line when the door width is over 1400.

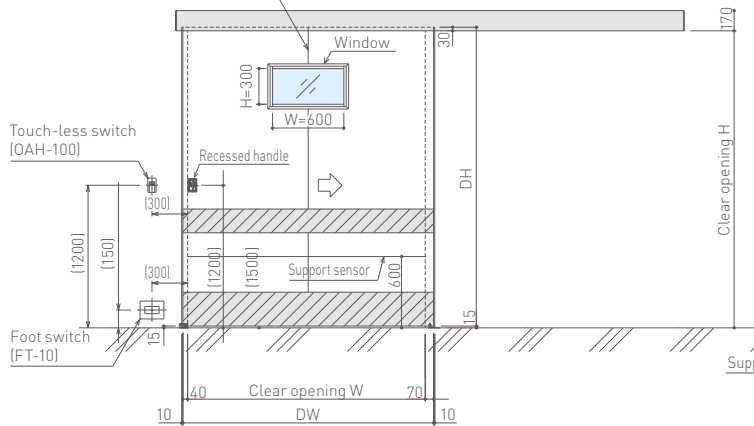

Unit: mm

### ● Section

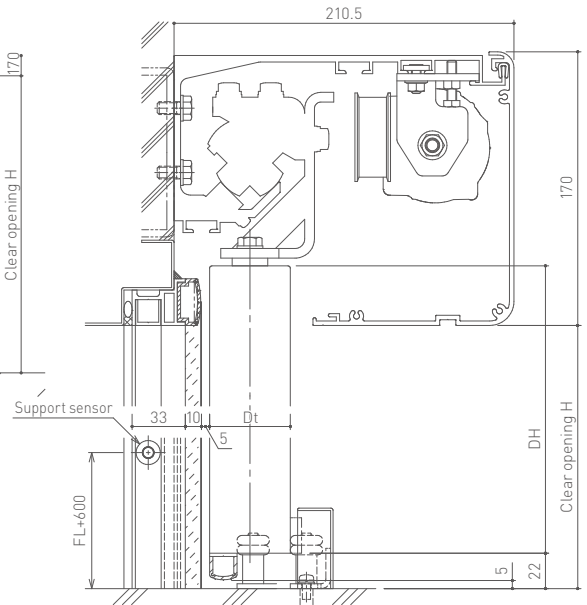

\*The section shows when the door is fully opened

\*Handle, window, waist plate, kick plate and lock are optional

## Specifications

Use applications		Air tightness + Sound insulation		Air tightness + Sound insulation + X-ray shield	
Door leaf		Aluminum/Stainless steel/Glass		Aluminum	Stainless steel
Door type		Single	Bi parting	Single	Single
Clear opening (mm)	Width (W)	700 - 2000	1200 - 2800	700 - 1600	700 - 1100
	Height (H)	1900 - 2500	1900 - 2500	1900 - 2500	1900 - 2500
Max weight		150kg			
Opening speed		up to 0.7m/s			
Hold open time		adjustable			
Ambient temperature		-10°C - 50°C			
Power supply		230VAC +6/-10% 50/60Hz Note: with transformer specified by NABCO			
Power consumption		45Wh			
Relative humidity		20% - 85% RH			
Air permeability		A-4 [JIS A 4702]			
Sound insulation		T-1 [JIS A 4702]*1		T-1 [JIS A 4702]	
X-ray shield		-		○ (Lead plate 2mm)	
Electric lock				○	

\*1 The type of glass door leaf has T-2 class of sound insulation.  
 If T-2 class is required for aluminum/stainless door leaf, please contact our sales distributor.

## Door leaf options

3 types of door leaves are selectable to suit your environment

Aluminum



Stainless steel



Glass



## Handle options

3 types of handles are selectable in case of power failure

Recessed handle



Tubular handle




Lever handle



## Detection device (Optional)

Foot switch



For hands-free opening.

Touch-less switch



For touch-less opening.

## Window options

3 types of windows are selectable to suit your environment

Double-sided flat frame



Aluminum frame



Outside

Inside (flat frame)

Stainless steel frame



Outside

Inside (flat frame)

Flat frame prevents the accumulation of dust.

## Nabtesco Corporation

Accessibility Innovations Company

Address : JA Kyosai Bldg., 7-9,  
Hirakawacho 2-chome,  
Chiyoda-ku, Tokyo,  
102-0093, Japan

Phone : +81(0)3-5213-1157  
Fax : +81(0)3-5213-1173

<http://nabco.nabtesco.com/en/>



ISO9001 / ISO14001 Certified



For further details, contact:

All specifications herein are subject to change without notice  
CAT. No. D666 0402 1509 04SE